


CE II 2 G/D c IIC T6 (85°C)



SSAT-2L (HH) AIR TIGER Shown

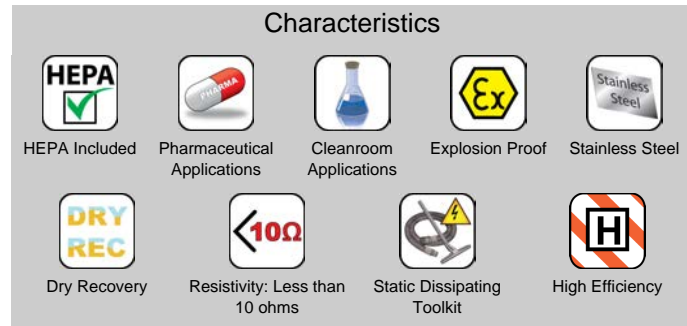

- Legally certified explosion proof/dust ignition proof by a recognized testing laboratory
- HEPA Filter - Included with an efficiency of 99.995% on 0.3 micron. Tested: IEST RP-CC001.3. H14 by MPPS method as per EN 1822.
- \*Cleanroom compatible. Can be used in the pharmaceutical industry
- Pneumatically (air) operated
- For dry recovery only
- All stainless steel SAE 304 construction
- Handheld with shoulder straps
- Recovery capacity of 0.5 gallon (2 liters) in optional Disposable Filter Bag
- Available with an optional Carrying Case
- Equipped with a complete static dissipating tool kit, including suction and air line hoses

All stainless steel SAE 304 construction. This unit is equipped with a true HEPA (H14) Filter. This unit is cleanroom compatible and can be used in the pharmaceutical industry. This vacuum cleaner has been designed for general maintenance in hazardous locations. Lightweight and ergonomic, this unit is ideal for use in areas where a larger vacuum cleaner would be cumbersome. All of our HEPA vacuum cleaners are Aerosol Leak Tested before leaving our facility.

## Specifications for model SSAT-2L (HH) AIR TIGER

## Compressor Specifications

Name	Part Number	Paper Bag Capacity	Vacuum Pressure	Air Flow	Venturi	Ideal Compressor HP	Input Air Pressur	Aire Line Size	Input Air Volume
SSAT-2L (HH) AIR TIGER	111896	1.9 L	2032 mm H <sub>2</sub> O	23.6 L/s	Single Venturi	5 HP	80 PSI / 1160.3 Bar	1/2"	7.1 L/s
	Dimensions: W21.6 cm x L50.8 cm Weight: 4.99 Kg Noise Level: 0.00 dB(A)								

### HEPA - High Efficiency Particulate Air Filter

A HEPA filter is a type of air filter, which means it filters the air coming in or out of the vacuum cleaner system. It can remove at least 99.99% of dust, pollen, mould, bacteria and any other airborne particles with a size of 0.3 micron or larger.

North-America: Each HEPA Filter has a minimum filtration efficiency of 99.99% on 0.3 micron. Tested as per IES-RP-CC001.3.

Europe: Each HEPA Filter has a minimum filtration efficiency of 99.995% on 0.3 micron, rated H14 as per EN 1822 by MPPS method.

## Tools & Accessories

### STATIC CONDUCTIVE TOOLS AND ACCESSORIES (RESISTIVITY OF 10/3 - 10/5) - Included

Part#	Quantity	Description
383448	1	STATIC CONDUCTIVE CRUSHPROOF SUCTION HOSE ASSEMBLY (NO WIRE) 1.5" x 5' FOR SSAT-2L & SSAT-6L
211029	1	AIR SUPPLY HOSE ASSEMBLY SD* Ø0.5"(12.7mm)x25'(7.5m) WITH 1 MALE QUICK DISC. & 1 FEMALE QUICK DISC.
211607	1	SHOULDER STRAP SET
381185M A	1	DUSTING BRUSH ALUMINUM 5" (125mm) WITH CONDUCTIVE BRISTLES NO METAL CONNECTOR INSTALLED
383462	1	CONICAL NOZZLE ASMBLY w/CURVED TIP 10"(25cm) CONDUCTIVE RUBBER FOR NON WIRE HOSE (323562+381155)

### KANAFLEX SUCTION HOSE ASSEMBLY - MANDATORY FOR USE WHEN RECOVERING CONDUCTIVE, METAL AND PYROTECHNIC DUST. STATIC DISSIPATIVE (LESS THAN 10 OHMS) - Optional

Part#	Quantity	Description
381396D	1	KANAFLEX SUCTION HOSE ASSEMBLY SD* Ø1.5" x 5' (Ø38mm x 1.5m) FOR USE w/ SSAT-2L & SSAT-6L AIR TIGER

### CARRYING CASE - Optional

Part#	Quantity	Description
215696	1	CARRYING CASE FOR SHOP USE (2 pc) WITH WHEELS FOR MODEL SSAT-2L (HH) AIR TIGER

### Warning:

For the recovery of metallic dusts, it is recommended that this unit be used in conjunction with an immersion separator



**Arc Technologies**

Worldwide Technology For Controlled Environments

Web site: [www.arctechnologies.co.uk](http://www.arctechnologies.co.uk)

email: [achambers@arctechnologies.co.uk](mailto:achambers@arctechnologies.co.uk)

Tel: +(44)0115 928 1508